

# NavLinkz Dual-View CVBS PAL camera


## CAM-2P130M

### Delivery content

Camera with  
2x cable 0.50m

Gasket


Screws

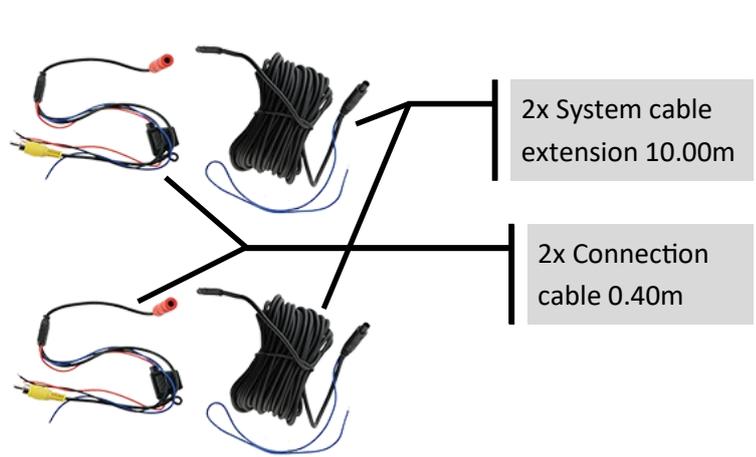

2x System cable  
extension 10.00m

2x Connection  
cable 0.40m

### Installation

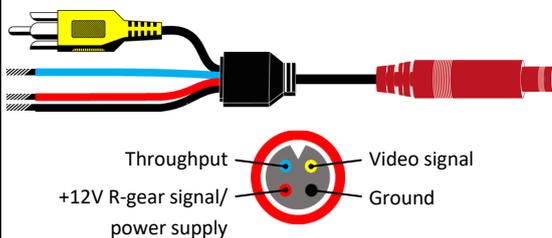

**Note:** If the camera is powered by reverse gear lamp signal, we recommend to install a relay between the power supply of the reverse signal and the power supply of the camera, to ensure a stable and uninterrupted power supply and to avoid vehicle computer errors. The **throughput wire** can be used to connect the reverse gear lamp signal from back to front.

**In case the isolation of the camera is harmed in the moisture section close to the camera, it is mandatory to repair the isolation. Otherwise the camera will inevitably become moist inside sooner or later.**

**Do not expose camera to high pressure cleaners.**

### Produkt features

- Dual-View camera for vertical mount on with two stepless adjustable cameras.
- 2x CVBS [PAL] 1/4 inch CMOS sensor-type
- Aperture F1.36
- Light sensitivity 0.02 Lux
- Long-range camera V1 angle H=80°, V=60°, D=100°
- Close-up camera V2 angle H=110°, V=80°, D=150°
- Mirrored picture (fixed)
- Protection class IP69
- Suitable for permanent operation (connection to ACC)
- Mini 4pin-BM system harness, integrated throughput wire (blue)
- 2x 10.90m total system cable length, consists of:
  - 2x 0.50m cable fixed on camera to female 4pin-BM (∅ 5mm)
  - 2x 10.00m extension cable male 4pin-BM to female 4pin-BM
  - 2x 0.40m adapter male 4pin-BM to male RCA and power wires

### Specifications

- Dual camera 115 x 42 x 44mm (W x H x D)
- Operating voltage +12V DC
- Current consumption max. 2x 60mA
- Operating temperature range -30°C bis +75°C
- Storage temperature range -40°C bis +80°C