

# Vehicle-specific camera

## VSC-E-ME18

### Delivery content




Connection cable 0.40m

Exchange rear door opener handle with integrated camera  
incl. 0.60m cable  
(exemplifying figure)

System cable extension 8m

### Installation

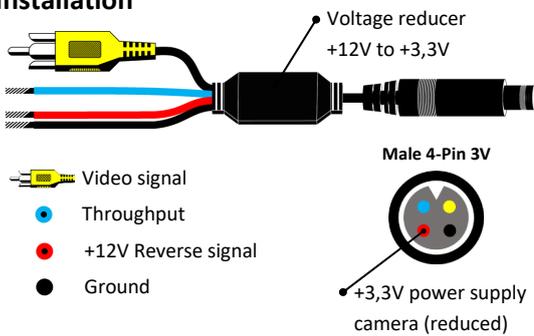

### Camera not suitable for permanent operation!

**Note:** If the camera is powered by reverse signal we recommend to install a relay between power supply of reverse signal and power supply of the camera to ensure a stable and uninterrupted power supply and avoid unwanted errors in the board computer.

### Product features

- Sensor type CMOS 1/4inch HD NTSC low-light sensitive
- Resolution 800TVL
- Min illumination 0.01 Lux
- Angle h=140°, v=105°, d=180°
- Mirrored image (fixed)
- Parking guide lines, optional switchable
- System cable with throughput, e.g. for reverse signal
- Protection class IP69K
- Camera colour black
- Total cable length 9m
- Video connector RCA male connector
- System connector camera 4pin 3V
- Diameter camera connector 5mm
- Power supply **+12V DC (6 ~ 16V)**
- Operating voltage camera **+3,3V DC**
- Current consumption 50mAh
- Power consumption 0.6W
- Operating temperature range -30°C to +75°C
- Storage temperature range -40°C to +80°C

### Camera configuration

(cut cable loops if required)

**With** guide-lines 

**Without** guide-lines 

### Tip for dealers:

Inform your end customers that the rear-view camera mustn't be cleaned by steam cleaner!

**In case the isolation of the camera is harmed in the moisture section close to the camera, it is mandatory to repair the isolation. Otherwise the camera will inevitably become moist inside sooner or later.**