



Mini AHD/CVBS rear-view camera

CAM-AN150T

Delivery content

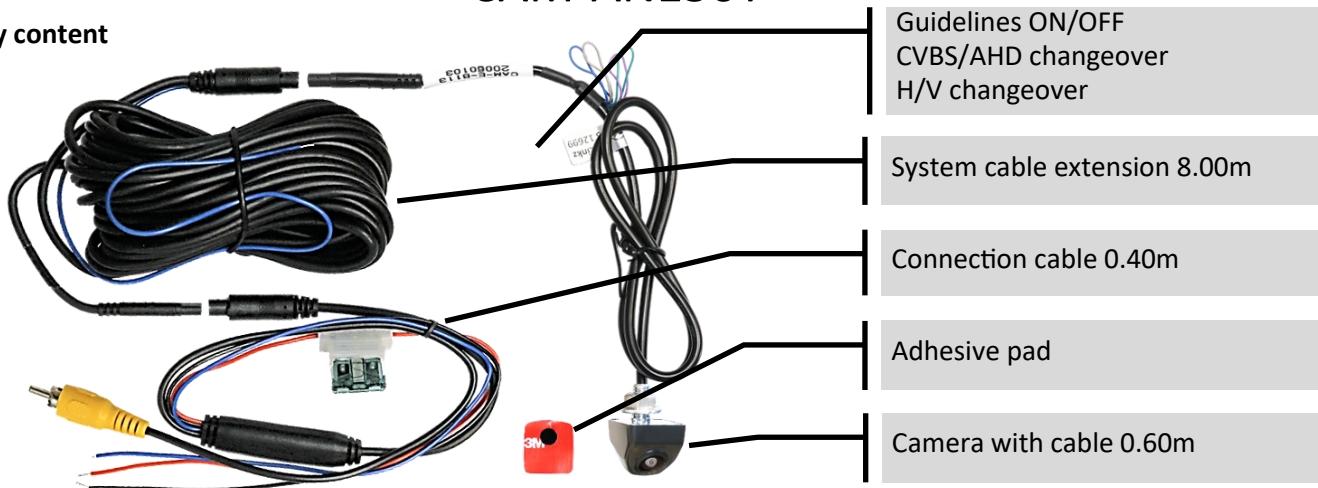

Installation

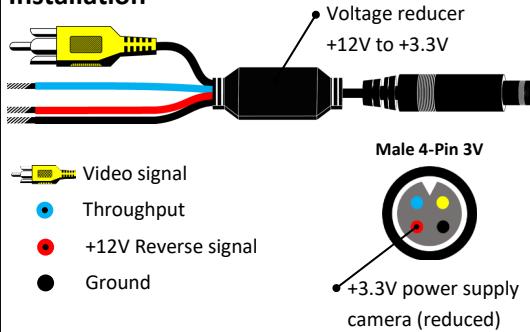

Note: If the camera is powered by reverse gear lamp signal, we recommend to install a relay between the power supply of the reverse signal and the power supply of the camera, to ensure a stable and uninterrupted power supply and to avoid errors in the vehicle computer.

In case the isolation of the camera is harmed in the moisture section close to the camera, it is mandatory to repair the isolation.

Otherwise the camera will inevitably become moist inside sooner or later.

Product features

- Mini AHD/CVBS camera NTSC in metal housing (black)
- Cable-guided thread tube with counternut
- System cable with throughput, e.g. for reverse signal
- Horizontal mount-under and vertical mount-on possible
- Mirrored picture (fixed)
- Sensor type AHD/CVBS CMOS 1/4 inch NTSC low-light sensitive
- Resolution 1080p
- Frame rate up to 30fps
- Light sensitivity 0.01 Lux
- Aperture F1.36
- Angle H = 150°, V = 85°, D = 175°
- Guide-lines can be switched off
- Protection class IP69K
- Suitable for permanent operation (ACC)
- Power supply **+12/24V DC (6 ~ 28V)**
- Operating voltage camera **+3.3V DC**
- Current consumption max. 90mA
- Video connection RCA male connector
- System cable of camera 4pin 3V
- Diameter of camera connector 5mm
- Total cable length 9.00m
- Operating temperature range -30°C to +75°C
- Dimensions camera without thread tube
25 x 22 x 27.7mm (W x H x D)

Camera configuration (cut cable loops if required)

With guide-lines



Horizontal under-mount



Without guide-lines




Vertical on-mount



AHD 1080p Signal



CVBS Signal



Version 2508